

2/4 Port USB KVM Switch / 2 Port USB Hub

Immediate Image Transfer
Absolutely No Delay

Effortlessly Share
Multiple Computers,
Audio and USB Devices




Never Stop Listening

(Back)



Diagram

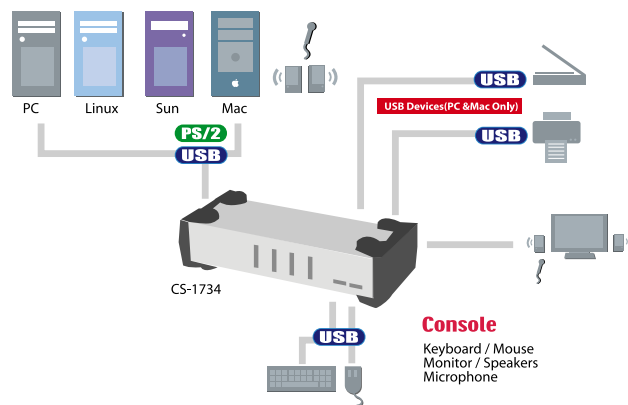

Model: CS-1732A/1734A

Features

- One console controls 2/4 computers and two additional USB 1.1 devices
- Bidirectional switching & flexible interoperability; switch permits independent PC, independent peripheral, and independent audio function, regardless of KVM switch focus
- Dual interface - supports computers with PS/2 or USB keyboards and mice
- Supports PC, Mac, Linux and Sun Systems
- Complete keyboard and mouse emulation for error free booting and realtime switching
- Easy installation - no software required
- Superior video quality; 2048 x 1536; DDC2B
- A lifetime of firmware upgrading
- Audio enabled

Specifications:

Model	CS-1732A	CS-1734A	
Computer connections	2	4	
Port Selection (KVM)	Push Button, Hotkey		
Port Selection (USB Devices)	Hotkey		
LEDs	On Line/Selected	2 Orange	4 Orange
	USB Link	2 Green	4 Green
Console	Keyboard	1 x USB	1 x USB
	Mouse	1 x USB	1 x USB
Connectors	Video	1 x HDB 15	1 x HDB 15
	Audio	1 x Stereo port + 1 x Mic port	
CPU	Audio	2/4 x Stereo port + 2/4 x Mic port	
	Computer	2 x SPHD	4 x SPHD
USB Peripherals	2 x USB Type A		
Power	DC Jack (Spare)		
Firmware upgrade	RJ 11 x 1		
Scan Interval	1~99 seconds (5 seconds default)		
VGA	2048 x 1536		
Weight	560g	690g	
Dimensions	130x75x42mm	200x75x42mm	
Enclosure	Metal		